



SlowStop Horseshoe Bollard-Type 2 (4" Diameter)





Color: Standard Yellow Bollard on Black Bases

Diameter: 4" (3.5" ANSI Schedule 40)

Height: 28"

Width: 36"

Set Screws: 5 M16 x 2.00
mm Hex

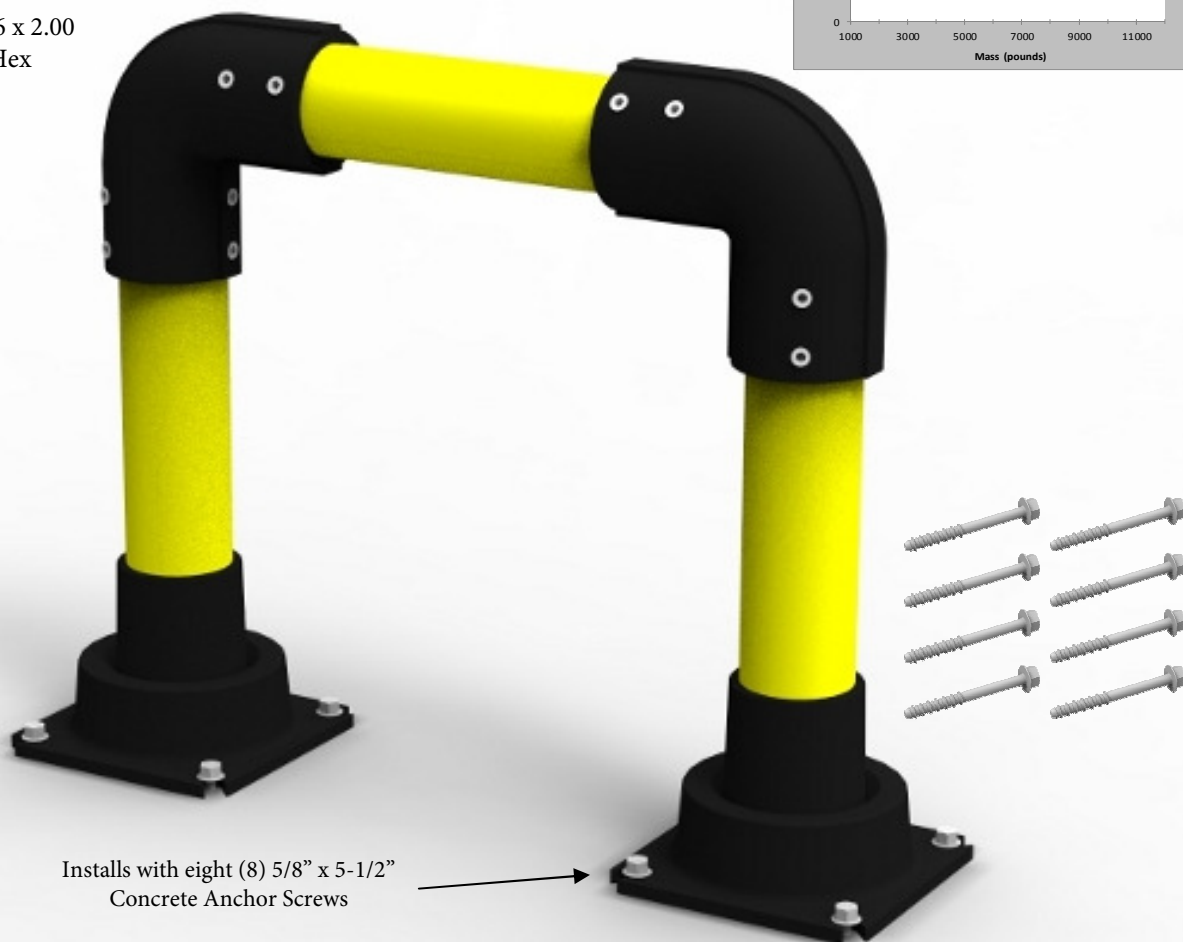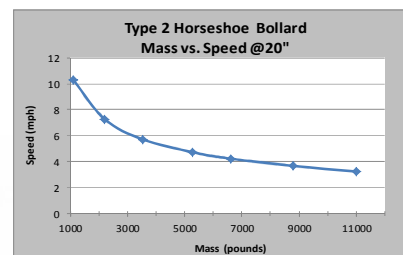

SPECIFICATIONS

- Energy Absorption: 5,334 joules / 3,934ft-lb.
- Temperature Rating: -40°
- Pipe Coating: 150µm Polyester Outdoor Powder Coat
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating

RECOMMENDED USES

- Gas Pump Protection
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Utility Protection
- Access Denial
- Post-tensioned Concrete
- Not for K-Rated Security Use

IMPACTrecovery
SYSTEMS

"Performance for a Safer Tomorrow"

4955 Stout Dr. San Antonio, TX 78219
210.736.4477, 800.736.5256, fax: 210.734.6448
www.slowstop.com